

온수분배기 (난방분배기)

(,)



(KS B007)


급수급탕분배기 (위생분배기)

(,)



(Q)

- 가
 - (A) 가
 - (Bracket) 가
 - () 가
 - () 가
 - () 가
- 15kgf/cm², -8kgf/cm²
 - 7kgf/cm²




(Parts & Materials)


Bay	Stainless Steel KSD3595
Bracket	Forged Brass SB2308
Bracket Nut	ST304
Bracket	SHP1KSD3501& Stainless Steel KSD3698
Bracket Coating	Enamel MS701
Adapter	Forged Brass KSD5101
Adapter	Forged Brass KSD5101
Socket	Stainless Steel KSD3595

(Dimension)

	H	L	W	A	B	C	N
TY-H3	8	3	0	06	42	8	P3
TY-H4	8	3	0	06	42	8	P4
TY-H5	8	3	0	06	42	8	P5
TY-H6	8	4	0	06	42	8	P6
TY-H7	8	4	0	06	42	8	P7
TY-H8	8	5	0	06	42	8	P8
TY-H9	8	5	0	06	42	8	P9
TY-H10	8	6	0	06	42	8	P



(Type)



(Type)





(Type)



(Type)

(Stainless) 가 가

- 가
 - (A) 가
 - (Bracket) 가
 - () 가
 - () 가
 - () 가
- 15kgf/cm², -8kgf/cm²
 - 7kgf/cm²

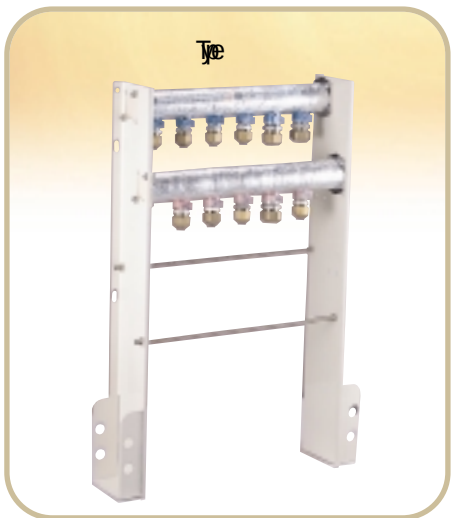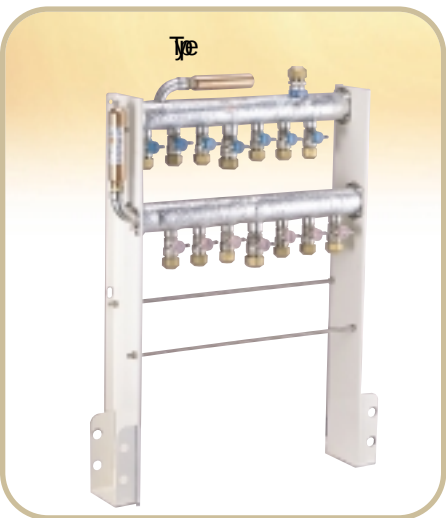

(Parts & Materials)


Bay	Stainless Steel KSD3595
Bracket	Forged Brass SB2308
Bracket Nut	ST304
Adapter	Forged Brass KSD5101
Bracket	SHP1KSD3501& Stainless Steel KSD3698
Bracket Coating	Enamel MS701
Socket	Stainless Steel KSD3595

(Dimension)


	1H	2H	L	W	A	B	C
2	8	8	X60+mm	1	06	42	8

가


Q

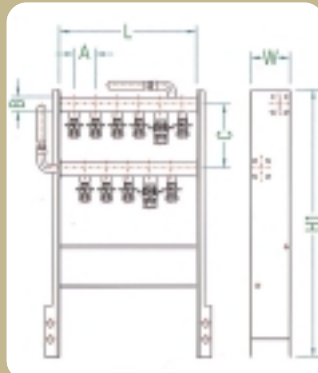


(Type)

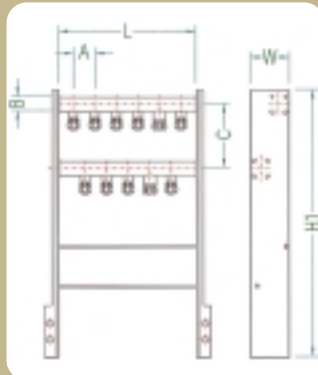

(Type)

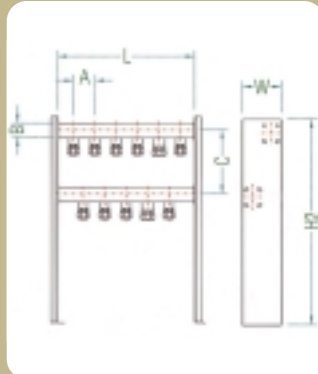


(Type)

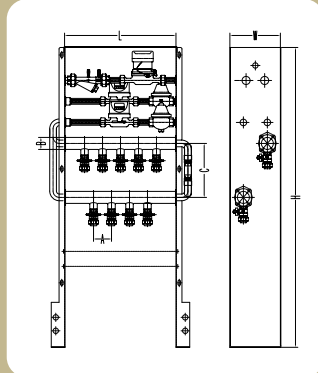

급수급탕분배기 제작 사양

(Q)

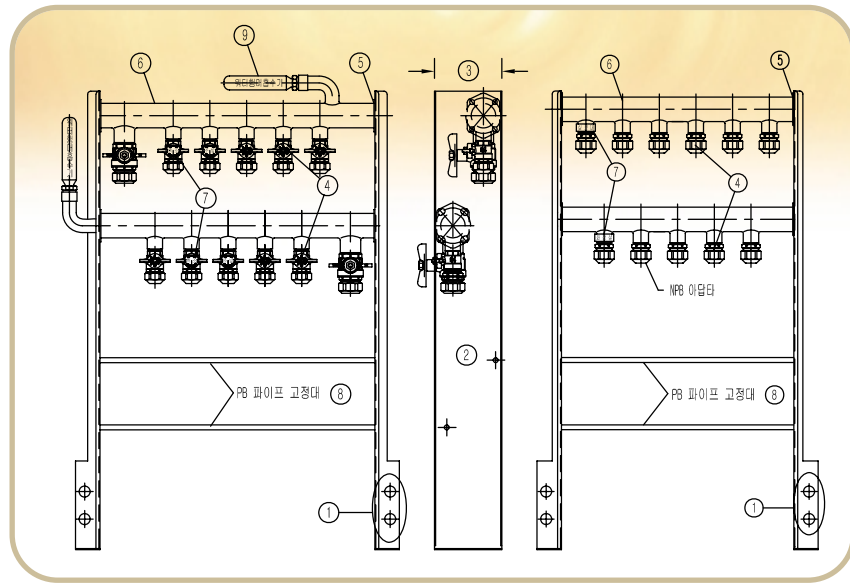



10mm
B
AC
1
(
가
Zone)
(
BP
가
)

(
,가
가

싱크수전세트

()

(Bow)
-15kgf/cm², -8kgf/cm²
7kgf/cm²

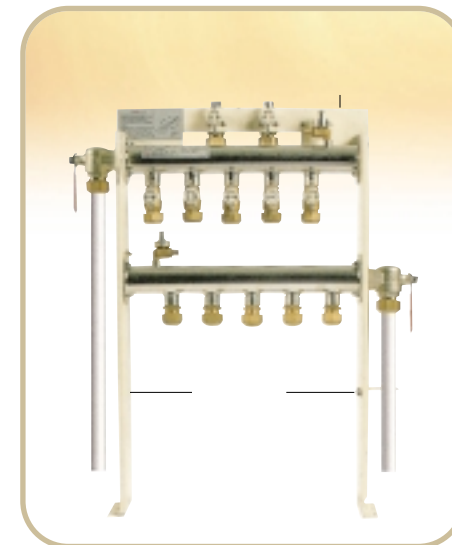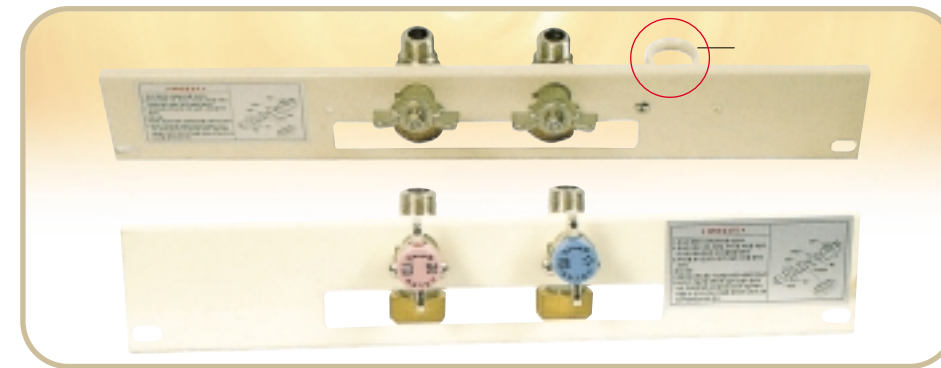

(Parts & Materials)

Bucket	SHPKSD3501
BackerCoating	Eramis M5701
BasePlate	FogedBaseK SB2308

(Dimension)

	4	5	6	7	8	9	11
(mm)	330	390	450	510	570	630	690




(Dimension)

A	220
B	100
C	60
D	250
E	15A ()

온수분배기 제작 사양

(K) (KSB007)

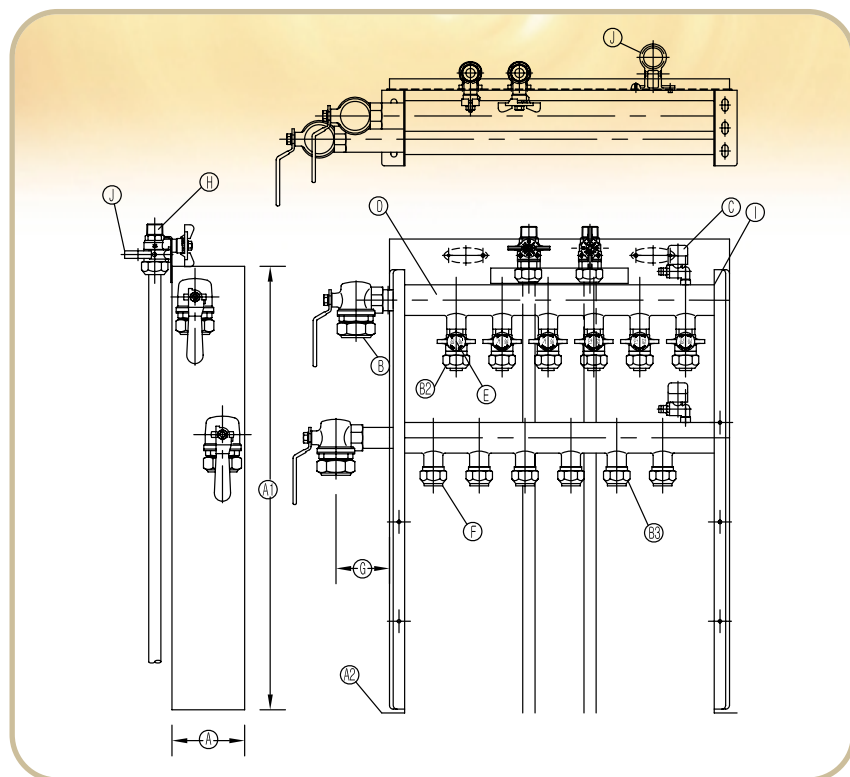


5mm100mm
8mm
2 가 가
XL PPC 3
가 (B2B3)
NEC
(A)
(Dra)
가
(A)
KSD3595
(A)
()
()
가
PB e
()


()
AC500V 1 가
가

14 M Ω


PB · 동파이프 관이음쇠




M () NPBQ ()




M () NPBFB ()



M () NPBQ ()



NPFB ()




NPBQ ()

PB · 동파이프 관이음쇠




(Dimension)

		1M	2M	L	1D	2D	1P	2P
B FB ()	15A20A	M20x1.5	M32x1.5	45	φ 18	φ 28	10	9
	20A20A	M32x1.5	M32x1.5	40	φ 28	φ 28	10	9
	25A25A	M38x1.5	M38x1.5	45	φ 28	φ 28	10	9
B FB ()	20A20A	M32x1.5	M32x1.5	50	φ 28	φ 28	10	9
	25A25A	M38x1.5	M38x1.5	50	φ 28	φ 28	10	9
NEC ()	15A20A	M20x1.5	M32x1.5	30	φ 18	φ 28	10	10
	20A20A	M32x1.5	M32x1.5	38	φ 28	φ 28	10	10
	25A25A	M38x1.5	M38x1.5	30	φ 28	φ 28	10	10

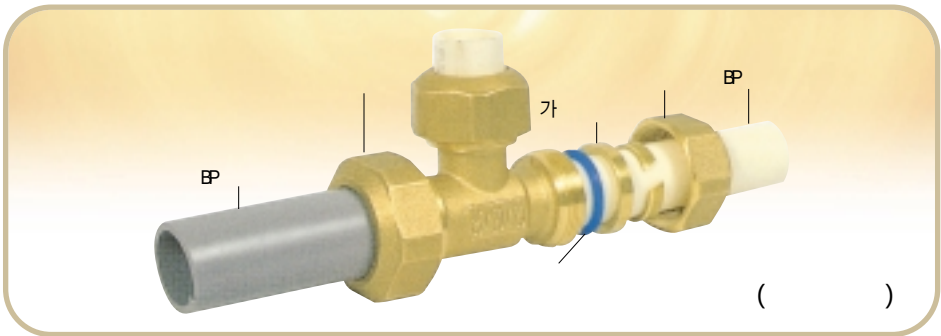


(Dimension)

		1M	2M	3M	L	1D	2D	3D	FD
B FB ()	25A20A20A	M38x1.5	M32x1.5	M32x1.5	88	φ 28	φ 28	φ 28	9
	20A25A20A	M32x1.5	M38x1.5	M32x1.5	90	φ 28	φ 28	φ 28	9
NEC ()	25A20A20A	M38x1.5	M32x1.5	M32x1.5	70	φ 28	φ 28	φ 28	10
	20A25A20A	M32x1.5	M38x1.5	M32x1.5	70	φ 28	φ 28	φ 28	10

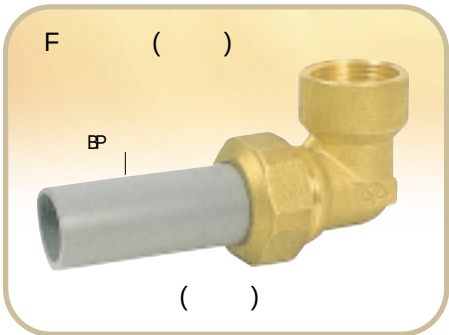

(Dimension)

		1M	TP	1L	2L	D	FD
B FB ()	1A	M32x1.5	PT 1/2" x 1/2"	50	40	φ 28	9
	2A	M38x1.5	1/2" x 1/2"	40	40	φ 28	9
NEC ()	1A	M32x1.5	PT 1/2" x 1/2"	50	33	φ 28	10
	2A	M38x1.5	1/2" x 1/2"	40	33	φ 28	10

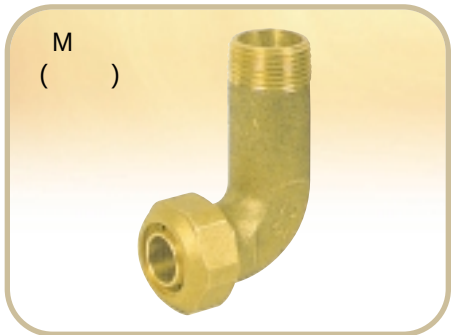


(Dimension)


		1M	TP	1L	2L	D	FD
B FB ()	1A	M32x1.5	PT 1/2" x 1/2"	70	40	φ 28	9
	2A	M38x1.5	1/2" x 1/2"	80	55	φ 28	9
NEC ()	1A	M32x1.5	PT 1/2" x 1/2"	70	38	φ 28	10
	2A	M38x1.5	1/2" x 1/2"	80	39	φ 28	10




NPBQ () NPBFB ()




NPFB ()



NPFB ()



F () NPBFB ()




M () NPBFB ()

보일러하부배관시스템 (수압셋트)


()

볼밸브

(KSE2308)

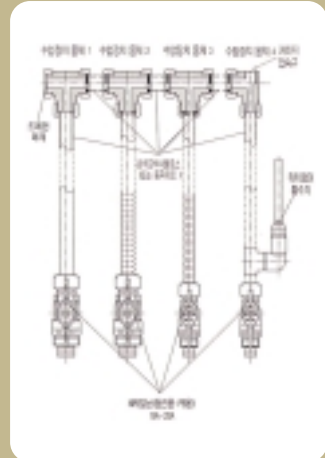



(Type)

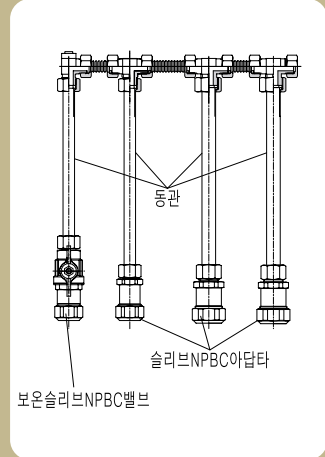

(Type)



- NPB NPB
- : -15kgf/cm², -8kgf/cm²
- : 7kgf/cm²

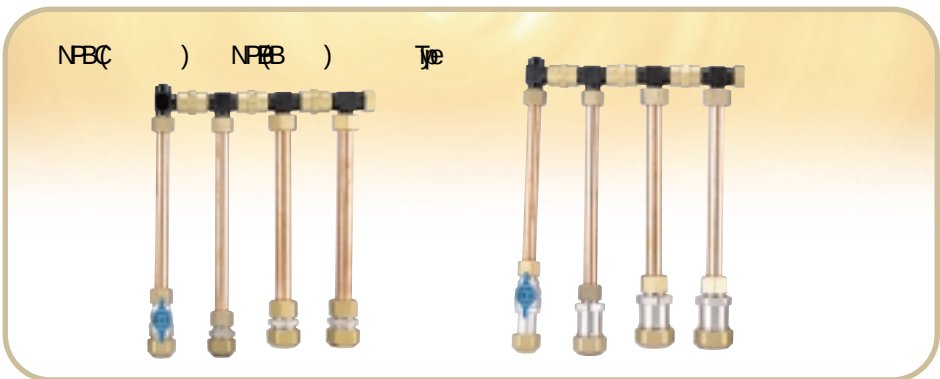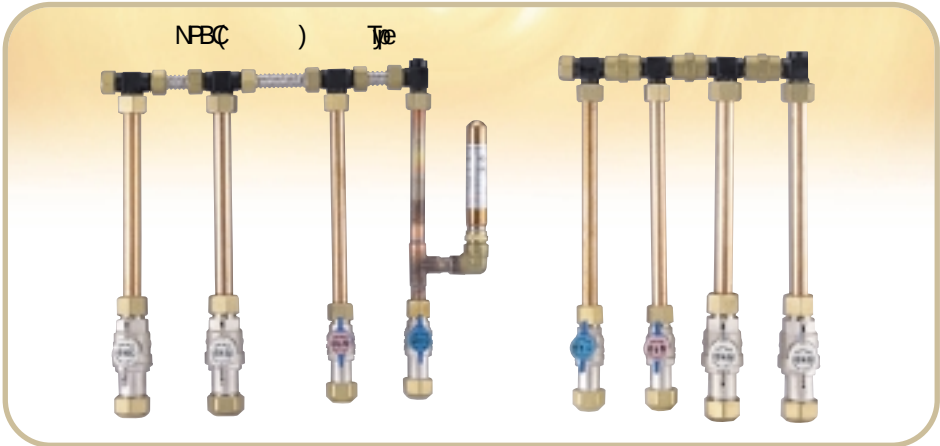

(: , , ,)
가 (가)

- : 가 , , , (C)
- : -30kgf/cm², -18kgf/cm²
- : 10kgf/cm²




(Parts & Materials)

Part	Material
Body	Forged Steel MB124
Body Cap	Forged Steel MB124
Ball	Forged Steel MB124 & Brass MB16
Seat	Brass MB16
Shaft	Reinforced Teflon
O-ring	NBR
Handle	Stainless Steel

(Dimensions)

Model	DN (mm)	Size (mm)	L (mm)	H (mm)	D (mm)	d (mm)
TYB05	8	4	74	24	56	8
TYB14	01	8	74	24	56	8
TYB06	51	2	25	74	58	01
TYB07	02	8	75	45	69	51
TYB08	52	1	27	75	6	02
TYB09	23	12	08	16	6	52
TYB10	04	12	29	76	3	23
TYB11	05	2	6	57	3	04
TYB5	56	22	8	89	2	05
TYB16	08	3	6	1	2	56

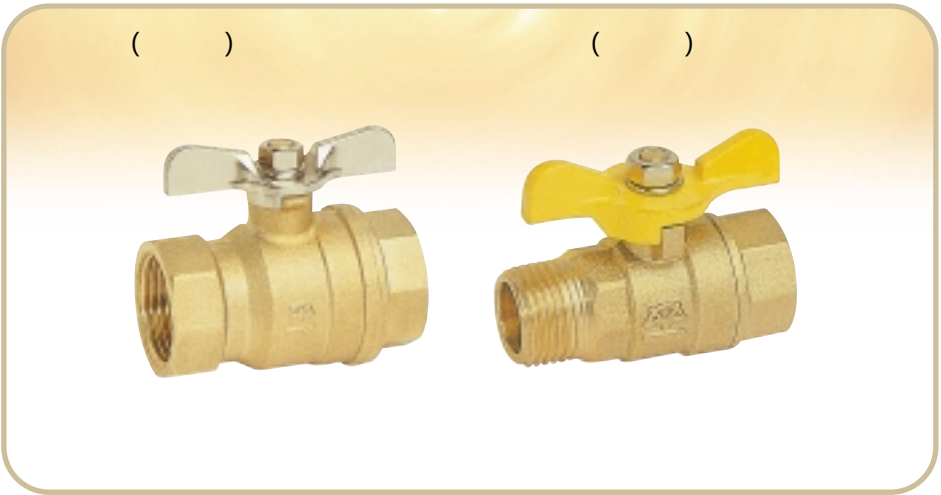


(Parts & Materials)


Part	Material
Body	Forged Steel MB124
Body Cap	Forged Steel MB124
Ball	Forged Steel MB124 & Brass MB16
Seat	Brass MB16
Shaft	Reinforced Teflon
O-ring	NBR
Handle	ZDC2

(Dimensions)

Model	DN (mm)	Size (mm)	L (mm)	1L (mm)	H (mm)	D (mm)	d (mm)
TYB05(M)	51	2	25	74	43	55	01
TYB07(M)	02	8	75	16	83	55	51
TYB08(M)	52	1	27	96	74	07	02



(×)



(×)




(×)

냉·온수용 밸브


(KSE2308)

삼방밸브


- XL FPC 가 3 (Ring) (Stone) (Se m) O-Ring 가 ()
- : -30kgf/cm², -18kgf/cm²
- : 10kgf/cm²





(P)



(MC)



(MC)

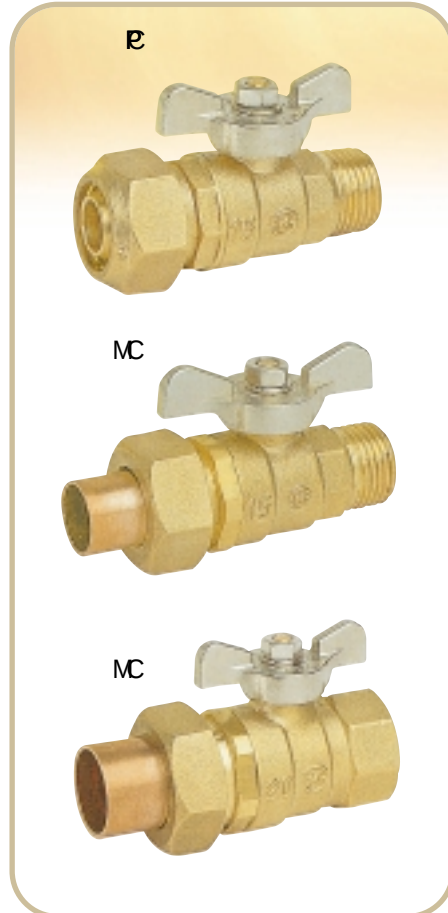


(Parts & Materials)

Body	Forged brass ASTM B124
Body Cap	Forged brass ASTM B124
Ball	Brass ASTM B16
Seat	Brass ASTM B16
Shaft	Reinforced Teflon
O-ring	NBR
Handle	ZDC2

(Dimension)

	Symbol	Unit	L	H	D	d
TVM6	15A	mm	17	43	05	01
TVM6	15A	mm	46	43	05	01
TVM7	20A	mm	77	83	55	51
TVM7	20A	mm	66	83	55	51
TVM7	20A	mm	26	83	55	51

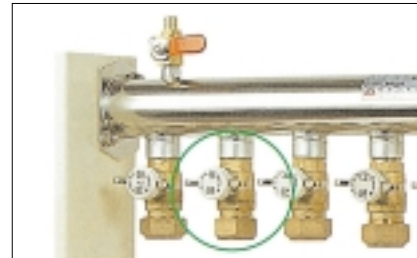

(Parts & Materials)

Body	Forged brass ASTM B124
Body Cap	Forged brass ASTM B124
Ball	Brass ASTM B16
Seat	Brass ASTM B16
Shaft	Reinforced Teflon
O-ring	N.B.R. Stone
Handle	Stainless Steel

(Dimension)

	Symbol	Unit	L	H	D	d
TVM5	8A	mm	04	62	24	5

- : (Ball) L T 가
- : -30kgf/cm², -8kgf/cm²
- : 7kgf/cm²




(Parts & Materials)

Body	Forged brass ASTM B124
Body Cap	Forged brass ASTM B124
Ball	Forged brass ASTM B124 & Brass ASTM B16
Seat	Brass ASTM B16
Shaft	Reinforced Teflon
O-ring	NBR
Handle	ZDC2

(Dimension)

	Symbol	Unit	L	H	D
T8W1	8	mm	74	42	56
T8W2	01	mm	84	42	56
T8W3	51	mm	85	82	59
T8W4	02	mm	46	23	59
T8W5	52	mm	87	04	2
T8W6	23	mm	88	54	2
T8W7	04	mm	69	05	2
T8W8	05	mm	10	95	2



니들밸브

- : (Needle) 가
- : -30kgf/cm², -8kgf/cm²
- : 7kgf/cm²




(Parts & Materials)

Body	Forged brass ASTM B124
Seat	Brass ASTM B16
Packing Nut	Brass ASTM B16
O-ring	NBR
Handle Wheel	ZnDC2 Enamel Paint

(Dimension)

	Symbol	Unit	L	H	D
TWC1	6	mm	43	34	03
TWC2	8	mm	54	75	35
TWC3	01	mm	25	26	35
TWC4	51	mm	55	88	06
TWC5	02	mm	57	59	06




플렌지식 볼밸브

(KSE2338)

절연 나사식 볼밸브

가



()

- (B) (Actuator) (STS304) (200A)
- 가
- :가
- : -30kgf/cm², -18kgf/cm²
- : 10kgf/cm²



(Parts & Materials)

Body	GCD403CPH2
BodyCap	GCD403CPH2
Ball	STS04
Shaft	SC
SealRing	PTFEF.P.G 1030
Leak	Seal C D400
VPacking	Teflon
O-ring	NR

(Dimension)

	Symbol	Unit	L	H	d
TYF0	04	mm	112	5	5
TYF1	05	mm	2	8	8
TYF5	56	mm	212	9	9
TYF6	08	mm	3	8	8
TYF7	10	mm	4	8	8
TYF8	15	mm	5	8	8
TYF9	18	mm	6	8	8

(Parts & Materials)

Body	SCR2
BodyCap	SCR2
Ball	STS04
Shaft	SC
SealRing	PTFEF.P.G 1030
O-ring	NR
Handle/Wheel	GCD00
VPacking	PTFE
GearBox	GCD00

(Dimension)

	Symbol	Unit	d	L	H	D
TYF0	0	mm	8	5	5	8
TYF1	1	mm	11	5	5	8
TYF2	2	mm	21	8	4	8



(200A)

: (Gear) (B)

- (P.TFE)
- :가
- : -30kgf/cm², -18kgf/cm²
- : 10kgf/cm²




(Parts & Materials)

Body	Forged brassASTMB124
BodyCap	Forged brassASTMB124
Ball	Forged brassASTMB124
Shaft	BrassASTMB16
Seal	Reinforced Teflon(F.P.G 1030)
O-ring	NR
Handle	Stainless
Insulator	P.TFE


(Dimension)

	Symbol	Unit	L	H	d	W
TYB11	05	mm	2	57	04	3



절연 플렌지식 볼밸브

(KSE2338)



()

- (B) (Actuator) (STS304) (200A)
- 가
- :가
- : -30kgf/cm², -18kgf/cm²
- : 10kgf/cm²




(Parts & Materials)

Body	GCD00
BodyCap	GCD00
Ball	STS04
Shaft	SC
SealRing	Reinforced Teflon(F.P.G 1030)
Leak	GCD00
VPacking	P.TFE
O-ring	NR
Insulator	P.TFE

(Dimension)

	Symbol	Unit	L	H	d	W
TYF10	04	mm	112	5	5	04
TYF11	05	mm	2	8	8	05
TYF15	56	mm	212	9	9	56



가스밸브 (휴즈콕크)

()

(KS B009)

볼밸브 (20K)

가

(Fuse) (Fie) (N) 가 가
 : 가
 : -0.35kgf/cm²
 : 30mm² O

(Fuse) 가 ()
 ()

(Fuse) Rest 가 가 가 가 Rest
 가 가


(Parts & Materials)

Part	Material
Body	Forged brass ASTM B124
Body Cap	Brass ASTM B16
Ball	Brass ASTM B16
Seat	Reinforced Teflon (P.T.F.E)
Ring	Polyacetal
O-ring	NBR
Handle	Zn Die Cast, Nickel Chrome Plated

(Dimensions)

Model	Size (mm)	Weight (g)	L (mm)	H (mm)	D (mm)	EW (mm)
TYB05A	1/2"	2	67	04	7	21mm f/v
TYB05B	1/2"	2	57	24	7	10
TYB05C	2/3"	3	97	24	7	12mm f/v

- (B)
- KS
- 가
- -30kgf/cm², -22kgf/cm²
- 20kgf/cm² (200PSI)

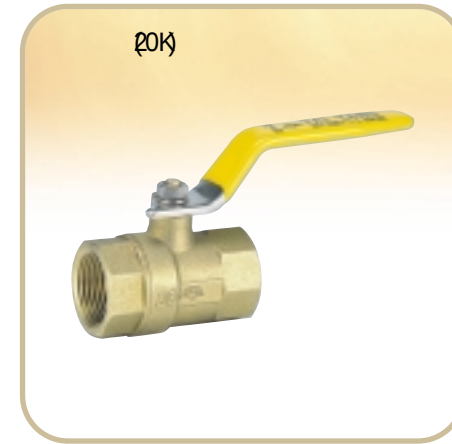


(Parts & Materials)

Part	Material
Body	Forged brass ASTM B124
Body Cap	Forged brass ASTM B124
Ball	Brass ASTM B16
Seat	Reinforced Teflon (P.T.F.E)
O-ring	NBR
Handle	Stainless Steel

(Dimensions)

Model	Size (mm)	Weight (g)	L (mm)	H (mm)	D (mm)	d (mm)
TYB26	51	2	65	54	58	21
TYB27	02	3	85	15	59	51



스톱밸브

- LPG Gas (Gas Nut) (Disc Seat) 가
- 가
- -30kgf/cm², -18kgf/cm²
- 16kgf/cm²



(Parts & Materials)

Part	Material
Body	Forged brass ASTM B124
Gas Nut	Brass ASTM B16
Ball	Brass ASTM B16
Seat	Brass ASTM B16
O-ring	NBR
Handle/Wheel	ALD Cast Zinc Alloy

(Dimensions)

Model	Size (mm)	Weight (g)	L (mm)	H (mm)	D (mm)
TY201	8	4	54	25	35
TY202	51	2	75	65	06

